

## 3 Port DVI KVM Switch with Audio

***Now you can switch easily and reliably between any combination of three DVI and USB equipped computers by using only one keyboard, LCD monitor and mouse.***

### **Saves Space, Time and money**

The LevelOne KVM-0306 DVI KVM switch with 3 ports saves desktop space. There is no need to work on a crowded desk cramped with several monitors, keyboards and mouse devices. Also, time to move from different monitors to access different systems are done away with. With only one monitor and keyboard and mouse, users can now access 3 computers of servers from one location quick and cost effective.

### **Monitor 3 systems from 1 console**

This high quality and durable DVI switch enables users to control 3 host computers or servers by using PS/2 and USB connectors from one console. Monitoring different systems is as easy as to connect them to this switch via PS/2 and USB Mouse connectors. The switch allows for input and monitoring of systems connected through its PS/2, USB Keyboard and Monitor.

### **Audio Enabled**

The KVM-0306 DVI switch has connectors for audio input and output. By simply connecting a microphone and speakers or earphones to the KVM switch, users can enjoy more interaction with the systems the KVM switch connects to.

### **Easy to Use**

The LevelOne KVM-0306 DVI switch switches DVI, USB and audio between computers or servers. Simply plug peripherals directly into the KVM switch and connect cables to the computers or servers to be monitored or controlled. Switching between either Macintosh or PC systems are easily done by either pushing a button or by using hot-key commands.



**KVM-0306**

### ***Related Products***



#### **KVM-0206**

2-port DVI KVM Switch w/audio for PS/2



#### **KVM-0406**

4-port DVI KVM Switch w/audio for PS/2

## Key Features

- Controls 3 DVI computers from a single console through USB and/or PS/2 connections.
- Supports hot-swap
- Supports LED display for PC status monitoring
- Supports DVI UXGA resolutions up to 1600 x 1200 @ 60HZ
- Self powered through USB connection
- Fully compliant with the USB 1.1/ 2.0 specification

## Technical Specification

### PC Connectors


- **Video**  
3 DVI UXGA female ports
- **USB**  
3 USB - B type female ports
- **Speaker**  
3 audio female jack ports
- **Microphone**  
3 audio female jack ports

### Console Ports

- **Keyboard**  
1 6 pin mini-DIN female port
- **Mouse**  
1 6 pin mini-DIN female port
- **Video**  
1 DVI UXGA female port
- **Keyboard**  
1 USB - A type female port
- **Mouse**  
1 USB - A type female port
- **Speaker**  
1 audio female jack port
- **Microphone**  
1 audio female jack port

- **Power Consumption**  
VGA, PS/2 connected: 350mA/ 440mA
- **Bus-power Limit Current Protection**  
500mA
- **Dimensions:**  
210mm(L) \* 92mm(W) \* 54mm(H)
- **Unit Weight**  
845g
- **OS Complies**  
Win 98/SE/ME/2000/XP  
Mac OS 9/X  
Linux Kernel 2.3 or above  
Solaris 8 (SUN Blade 100)
- **External Power Adapter**  
5V/2A
- **Certification**  
FCC, CE

## Product Diagram

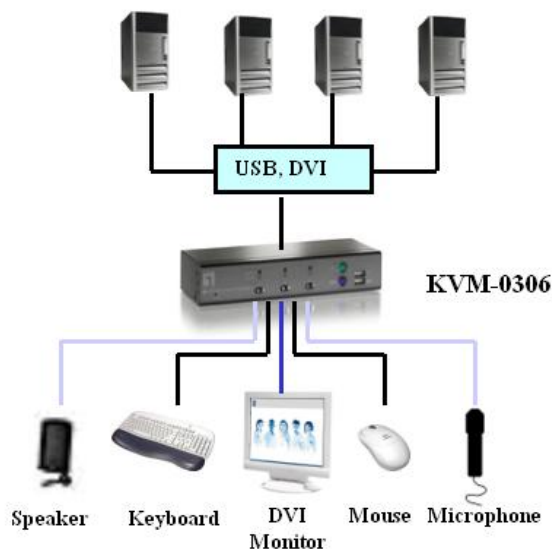

## Ordering Information

- KVM-0306: 3-Port DVI KVM Switch with Audio